


— PROPRIETARY —  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

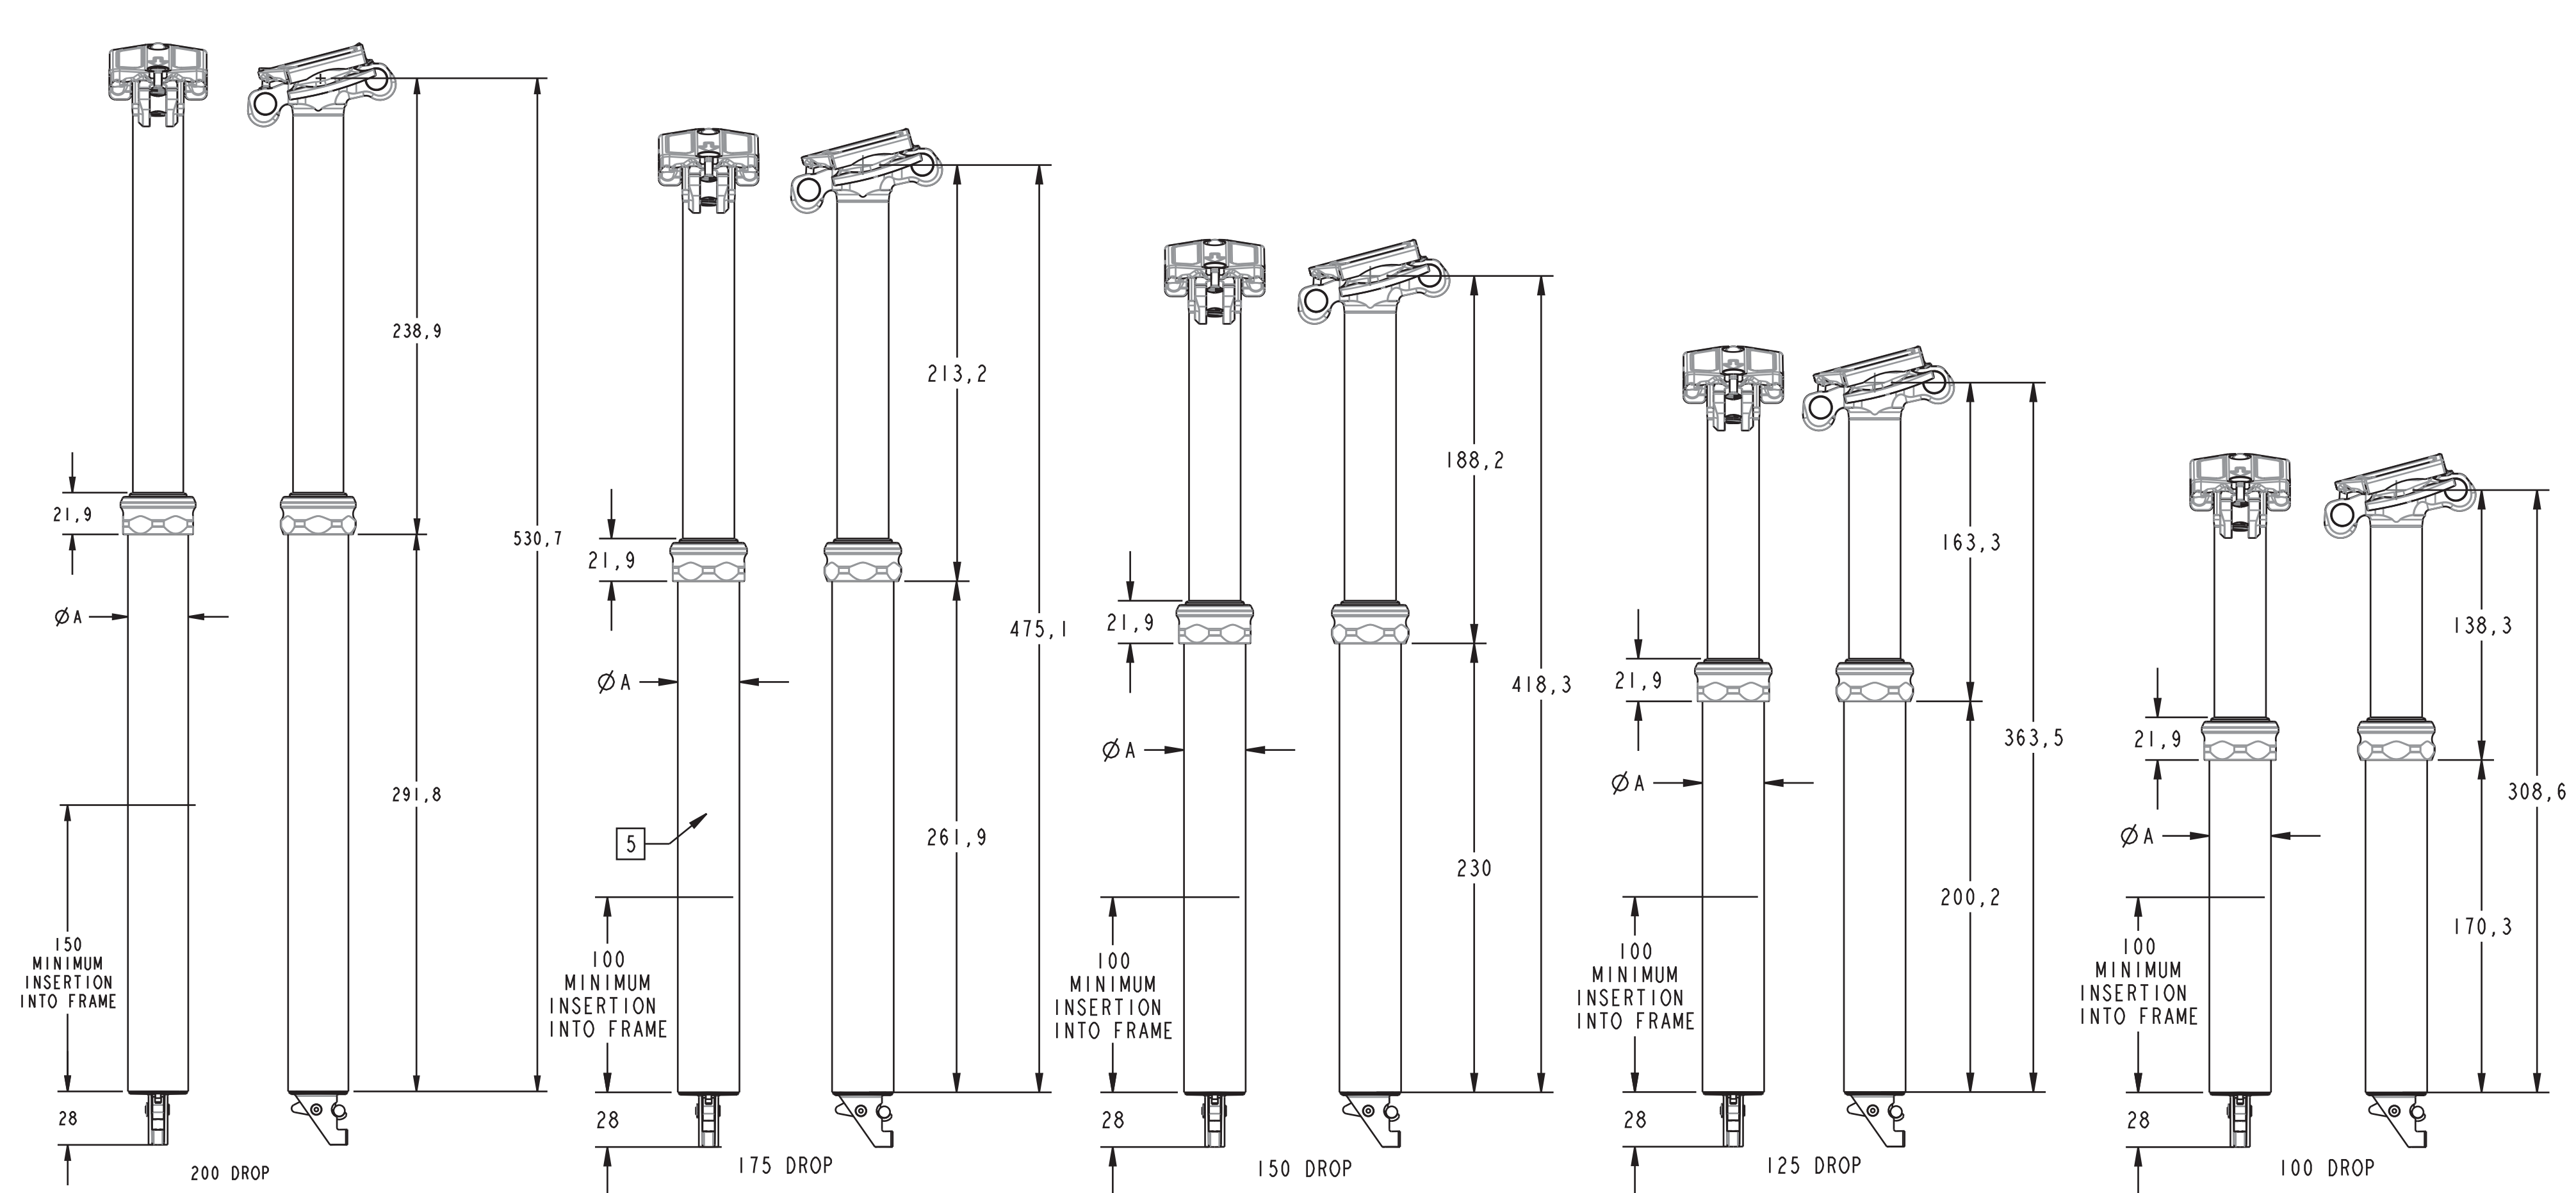

- SADDLE RAIL COMPATIBILITY:  $\varnothing$ 7MM STEEL/TI OR 7MM X 9MM OBOUND CARBON.  
 7MM X 9MM OBOUND CARBON RAILS REQUIRE SPECIFIC UPPER CLAMP.
- TORQUE SADDLE RAIL BOLTS TO 45 IN-LBF [5,1 N-M]
- ON CARBON FIBER FRAMES, APPLY THIN LAYER OF CARBON ASSEMBLY PASTE TO PREVENT SEAT POST SLIPPAGE.
- THOROUGHLY REVIEW OWNER'S MANUAL PRIOR TO INSTALLATION AND USE.
- MAX SEAT COLLAR BINDER BOLT TORQUE IS 45 IN-LBF [5,1 N-M]  
 NOTE: EXCESSIVE SEAT TUBE COLLAR BINDER BOLT TIGHTNESS CAN CAUSE THE UPPER SEAT POST TO BIND WITHIN THE LOWER SEAT POST

DIAMETER	30.9 OD	31.6 OD
$\varnothing$ A	30.9 +0.0/-0.1	31.6 +0.0/-0.1

**FOX** FOX Factory, Inc.  
 130 Hangar Way, Watsonville, CA 95076 USA, Ph 831-768-1100, Fax 831-768-9312

**2021 Transfer, Seat Post  
 User Specification**

SIZE	PART NO.
C	

PLOT SCALE NONE SHEET 1 OF 2